


MATH 2301

* Deterministic finite automata (DFA)

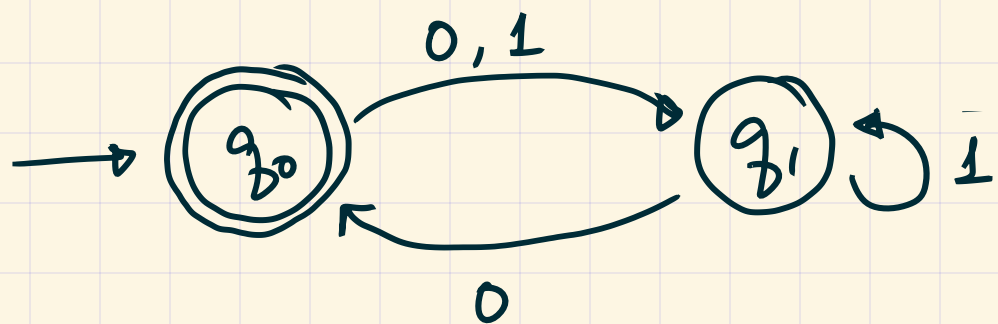

or state diagram of a DFA

** Def: A DFA consists of the following pieces of data:

1) An alphabet Σ


2) A set Q of "states"

3) A start state $q_0 \in Q$ or a hanging incoming arrow

4) A set of accept states $A \subseteq Q$ or doubly-circled

5) A transition function $\delta: Q \times \Sigma \rightarrow Q$
state you're at letter you read where you end up

** Example

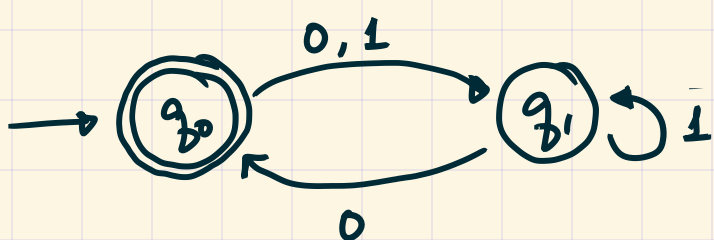

$$\Sigma = \{0, 1\}$$

$$Q = \{q_0, q_1\}$$


q_0 the start state

$$A = \{q_0\}$$

$$\delta: Q \times \Sigma \rightarrow Q$$

Q	Σ	output in Q
q_0	0	q_1
q_0	1	q_1
q_1	0	q_0
q_1	1	q_1

** Reading strings (examples)

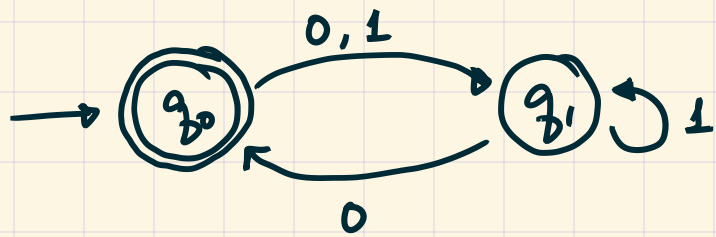


Let $w = 01101$

- 1) Start at the start state q_0
- 2) Read w from left to right, letter by letter, and follow the labelled arrows.

State	Letter read
q_0	0
q_1	1
q_1	1
q_1	0
q_0	1
q_1	(end)

Since we ended at q_1 and $q_1 \notin A$, we REJECT.

Other accepted words include
 $w = \epsilon$
 $w = 00$, $w = 010$

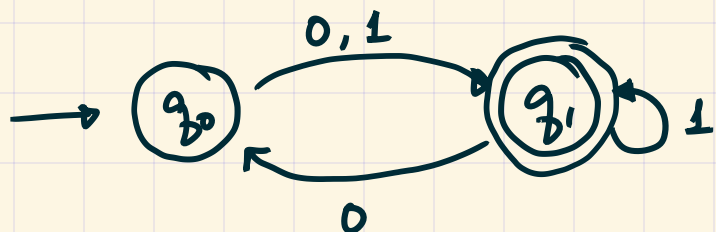

or This machine will accept $w = 01101$

It will accept $w = 0$, $w = 111$, $w = 001$


It will reject $w = 10$, $w = \epsilon$, $w = 00$

** The language of a DFA

Let M be a DFA. The language of M , denoted $L(M)$, is the set of strings that M accepts.

** Question: Is there any relationship between languages of regular expressions and languages of DFAs?

** Example

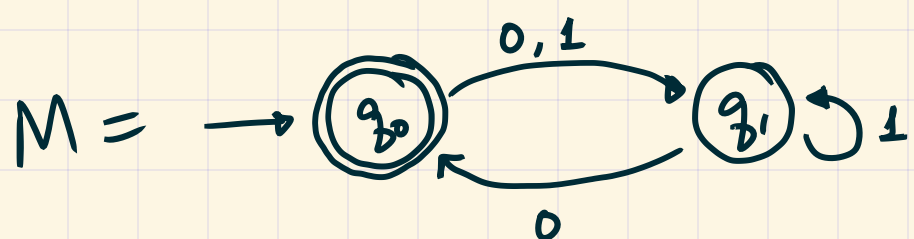


$$L(M) = L(r)$$

where $r = (0|1)1^*0^*$


** Let's try to "convert" regexs into machines, i.e., given a regex r , we'll try to build M such that $L(r) = L(M)$.

"Easy" cases, say $\Sigma = \{0,1\}$

1) $r = \phi$, $L(r) = \phi$

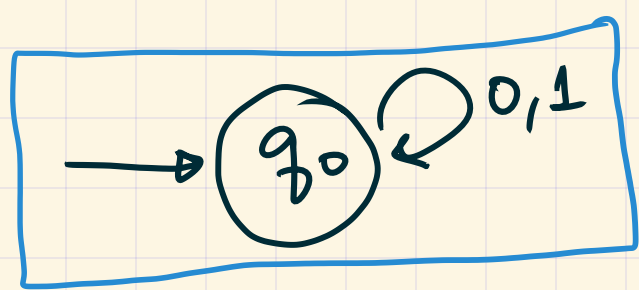


~ this machine rejects all strings, yay.

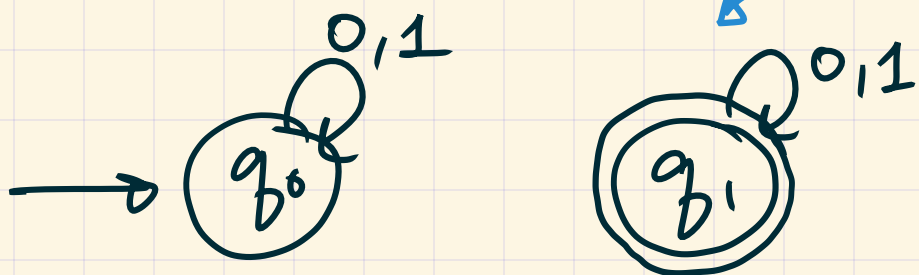

(and many other options...)

2) $r = \epsilon$, $L(r) = \{\epsilon\}$

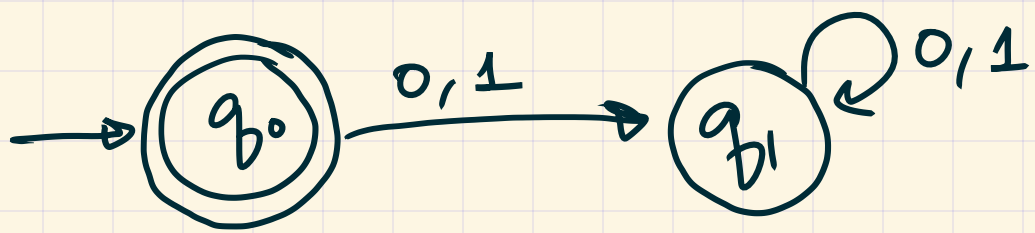


only accepts ϵ .

(and many other options...)

3) $r = a$ for some $a \in \Sigma$


$$L(r) = \{a\}$$

E.g. $r = 0$

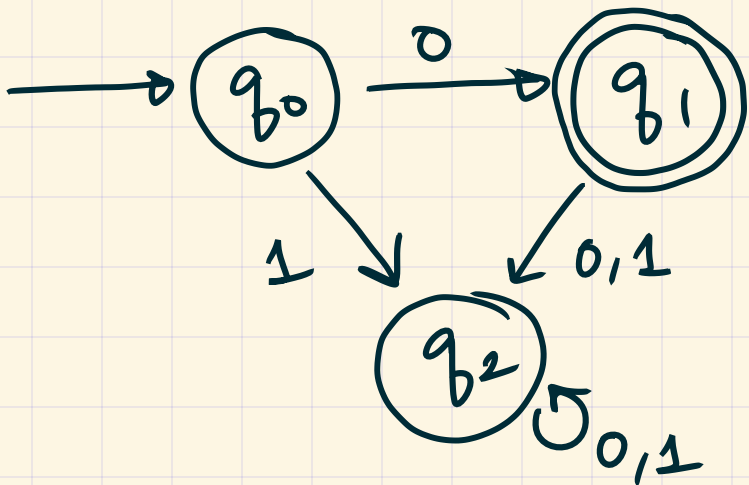

only accepts 0

E.g. $r = 1$

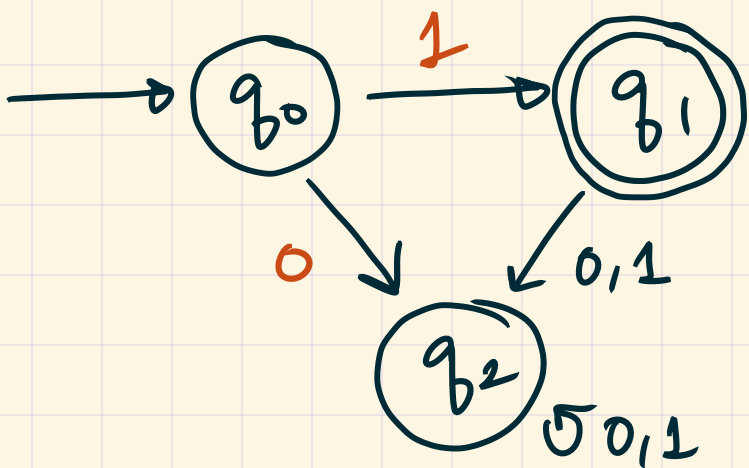

only accepts 1

4) $r = r_1 r_2$, $L(r) = L(r_1) \circ L(r_2)$

Q: Given M_1 & M_2 DFAs such that

$L(M_i) = L(r_i)$, construct a machine M ,

such that $L(M) = L(r)$